



# 900 Series

## Hot-Water Pressure Washers with 3450 RPM Motors

North America's #1 Manufacturer of High-Quality Cleaning Equipment

### Electric / Belt Drive



**Model 9525S**  
with Natural Gas-Fired  
combustion chamber

**Upright, oil-fired burner** delivers high efficiency and maintains constant temperature using diesel fuel, kerosene or home-heating oil

**Stainless-steel coil skin** provides extra durability to withstand the elements, resist corrosion and endure rough treatment

**Thermal rupture disk** protects the machine and user from heat expansion

**Adjustable upstream detergent injection** provides high-pressure sudsing for better cleaning

**Water-resistant cabinet, electrical box and motor**

**Hose reel** (optional) makes hose mobility and storage easy and convenient. Keeps work areas neat and safe while protecting hose from damage

**50-ft. length of high-pressure hose** (shown on reel) and **hanger** for ease in cleaning around a large area

**Control panel** includes adjustable temperature control, plus heavy-duty heater and pump motor switches

Easy to understand **operating instructions** and warning labels

**6.2 HP Baldor, 3450 RPM electric motor** is drip proof and comes with thermal overload protection

**Built-in wand holder** provides convenient storage

**Convenient hose reel bracket** (standard) accepts swivel or stationary reels



**Hotsy-designed triplex belt-drive pump** carries a 7-year limited warranty

**Every Hotsy** comes with 35 years of experience and rugged durability built-in

**Rust-proof, removable, non-contaminating polyethylene fuel tank** includes fuel gauge in cap. Tank is oversized to provide for long-running operating time (standard on oil-fired models)

**Wheel kit and handle** make for easy portability (standard on oil-fired models)

**Heavy-duty fuel filter** protects burner fuel pump

**Semi-pneumatic wheels** eliminate the risk of flats

**Model 950SS: Oil-Fired, 3.8 GPM @ 2300 PSI**

**Insulated Hotsy Trigger Gun**, rated to 3750 PSI. **36" insulated wand** with ergonomic, adjustable side handle

### FEATURES

- 3.8 GPM @ 2300 PSI
- Oil-Fired or Natural Gas-Fired
- 208V or 230V, 1PH; 208V, 230V, 460V or 575V, 3PH
- ETL-Certified to UL-1776 safety standards



**Float tank** helps maintain constant water pressure and flow and helps prevent sediment from entering the machine's components...great for use in well-water environments and low-water situations

# 900 SERIES Hot-Water ELECTRIC Models with 3450 RPM Motors

■ Oil-Fired or Natural Gas-Fired

■ 3.8 GPM @ 2300 PSI

■ Hotsy Triplex Pump with 7-yr warranty

■ ETL-Certified for safety

## Designed for tough, industrial cleaning.

### SPECIFICATIONS

### BELT DRIVE

MODEL	GPM	PSI	HP	MOTOR RPM	VOLT/PH	AMP	FUEL	PUMP	PUMP RPM	BTU/HR	PORTABILITY	HOSE	SHIP WT (lbs)
950SS	3.8	2300	6.2	3450	230/1	30	Oil	Hotsy Triplex	1390	342,900	Std	50'	740
950SS-208	3.8	2300	6.2	3450	208/1	33	Oil	Hotsy Triplex	1390	342,900	Std	50'	740
952SS	3.8	2300	6.2	3450	230/1	27	NG	Hotsy Triplex	1390	364,835	N/A	50'	635
952SS-208	3.8	2300	6.2	3450	208/1	28	NG	Hotsy Triplex	1390	364,835	N/A	50'	640
960SS	3.8	2300	6.2	3450	230/3	19	Oil	Hotsy Triplex	1390	342,900	Std	50'	675
960SS-208	3.8	2300	6.2	3450	208/3	20	Oil	Hotsy Triplex	1390	342,900	Std	50'	680
962SS	3.8	2300	6.2	3450	230/3	17	NG	Hotsy Triplex	1390	364,835	N/A	50'	595
962SS-208	3.8	2300	6.2	3450	208/3	18	NG	Hotsy Triplex	1390	364,835	N/A	50'	600
963SS	3.8	2300	6.2	3450	460/3	9	Oil	Hotsy Triplex	1390	342,900	Std	50'	710
964SS	3.8	2300	6.2	3450	460/3	7	NG	Hotsy Triplex	1390	364,835	N/A	50'	655
967SS	3.8	2300	6.2	3450	575/3	9	Oil	Hotsy Triplex	1390	342,900	Std	50'	710
969SS	3.8	2300	6.2	3450	575/3	7	NG	Hotsy Triplex	1390	364,835	N/A	50'	655

Dimensions: 45"l x 18"w x 48"h



### Clean better with Hotsy detergents

Hotsy pressure washers clean best when matched with our specially-formulated Hotsy detergents. Nearly all 40 Hotsy detergent formulations contain Hotsy's

exclusive advanced-formula HCC additives to help prevent scale build-up and fight corrosion in your equipment. Most Hotsy detergents are USDA and Canadian Agriculture approved. All are highly concentrated, so a little goes a long way.

### Spend some time with a Hotsy Expert

Hotsy has more than 130 local Sales & Service Dealers in North America, all factory-trained to properly evaluate your high-pressure cleaning needs.

Rely on your network of seasoned service professionals for the safest, most effective and most efficient solution to your specific cleaning need.



Distributed by:



Tel: (800) 525-1976 Fax: (888) 880-9631  
www.Hotsy.com email: info@Hotsy.com  
P/N 97-0589 Effective 9/06 Specifications & product descriptions subject to change without notice. ©2006 Hotsy



NOTE: We are constantly improving and updating our products. Consequently, pictures, features & specifications in this brochure may differ slightly from current models. Flow rates & pressure ratings may vary due to variances allowed by manufacturers of our machine components. We attempt to keep our machine performance within ± 5% of listed specifications.

### OPTIONS for 900 SERIES with 3450 RPM Motors

- **Primary & Additional Remote Stations** provide easy operation in wash bays or multiple stations
- **Shutdown Timer** allows automatic machine shutdown
- **Auto Start/Stop** provides preset & adjustable on/off machine operation
- **8" Natural Gas or LP-Gas-Fired Draft Diverters** prevent backdrafts; keeps cold air out & prevents water from running down vent pipes
- **8" Oil-Fired Draft Dampener;** barometric; prevent back drafts; keeps cold air out
- **LP Conversion (Factory installed)** converts natural gas to LP-fired system

### Hotsy Accessories customize your application for top performance


Telescoping wands extend to 24' to reach high places without scaffolding



360° Pivot and non-pivot hose reels keep hose neatly stored and shop areas safe



High-pressure turbo nozzles for faster cleaning

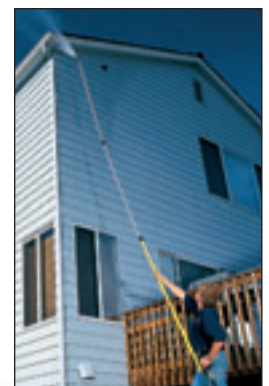

Heavy-duty, high-pressure hoses in lengths up to 150-ft.



Rotary surface cleaner attaches to your pressure washer; reduces overspray and zebra striping